


## TERMINAL BLOCK SERIES

### 組合式端子台


### SPECIFICATION 規格

Specification 規格	TB-60	TB-100	TB-200	TB-300
Current 電流	60A	100A	200A	300A
Voltage 電壓	600V			
Cross-Section 截面	16mm <sup>2</sup>	35mm <sup>2</sup>	100mm <sup>2</sup>	175mm <sup>2</sup>
Clamping Screw 鎖緊螺絲	M6	M8	M10	M10
Rated Torque (N-m) 額定扭力 (N-M)	2.5	6.0	10	10
Rated Torque (in-lb) 額定扭力 (in-lb)	22.1	53.1	88.5	88.5
Insulated Materials 絕緣材料	PC(PA66)			
Color 顏色	Black			
Operating Temperature (°C) 操作溫度 (5°C)	-40°C + 110°C (max +220°C)			
Conductor 導體	Copper, Nickel Plated 黃銅, 電鍍鎳			


TB-60

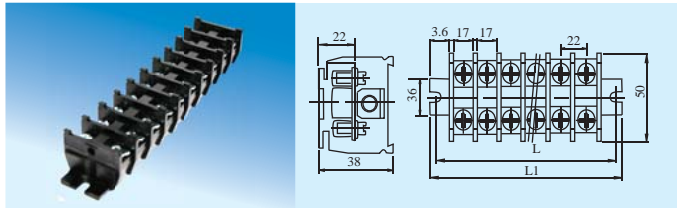


TB-100

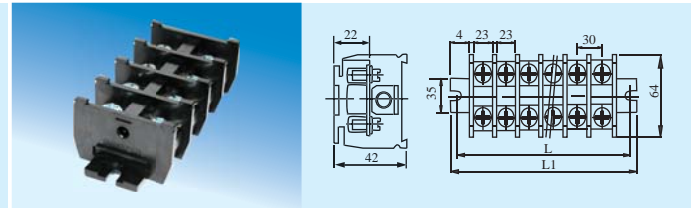

TB-200

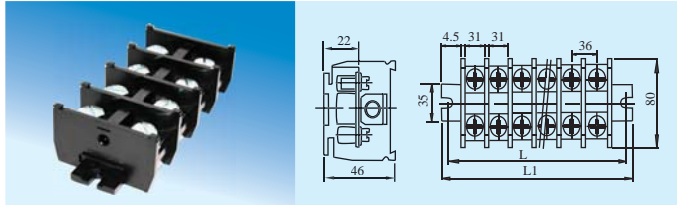

TB-300

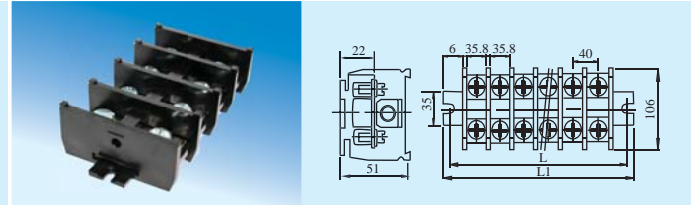

MODEL 型號	NO. OF POLET 代號	2	3	4	5	6	7	8	9	10	11	12
TB-60	L	60.8	81.4	102	122.6	143.2	163.8	184.8	205	225.6	246.2	266.8
	L1	73.8	94.4	115	135.6	156.2	176.8	197.4	218	238.6	259.2	279.8
TB-100	L	74	101	128	155	182	209	236	263	290	317	344
	L1	87	114	141	168	195	222	249	276	303	330	357
TB-200	L	91.5	127	162.5	198	233.5	269	304.5	--	--	--	--
	L1	104.5	140	175.5	211	246.5	282	317.5	--	--	--	--
TB-300	L	105.6	147.4	189.2	231	272.8	314.6	356.4	--	--	--	--
	L1	118.6	160.4	202.2	244	285.8	327.6	369.4	--	--	--	--