



CONTACT RATINGS

Model 型號	MY2-N, LY2-N		MY4-N		MK2P-N		MK3P-N	
	Resistive Load 電阻性負載	Inductive Load 電感性負載	Resistive Load 電阻性負載	Inductive Load 電感性負載	Resistive Load 電阻性負載	Inductive Load 電感性負載	Resistive Load 電阻性負載	Inductive Load 電感性負載
Rated Load 額定負荷	5A, 250VAC 5A, 30VDC	2A, 250VAC 2A, 30VDC	3A, 250VAC 3A, 30VDC	0.8A, 250VAC 1.5A, 30VDC	10A, 250VAC 10A, 28VDC	7A, 250VAC	10A, 120VAC 10A, 28VDC 10A, 250VAC	7A, 250VAC
Carry Current 通電電流	5A	10A	5A		10A			
Max.Switching Current 最大切換電流	250VAC 125VDC		250VAC 125VDC		250VAC 250VDC			
Max.Switching Power 最大切換功率	2,500VA 300W	1,250VA 300W	1,250VA 150W	500VA 150W	2,500VA 280W		2,500VA/1,000VA(NC/NO contact) 280W	


MY2-N

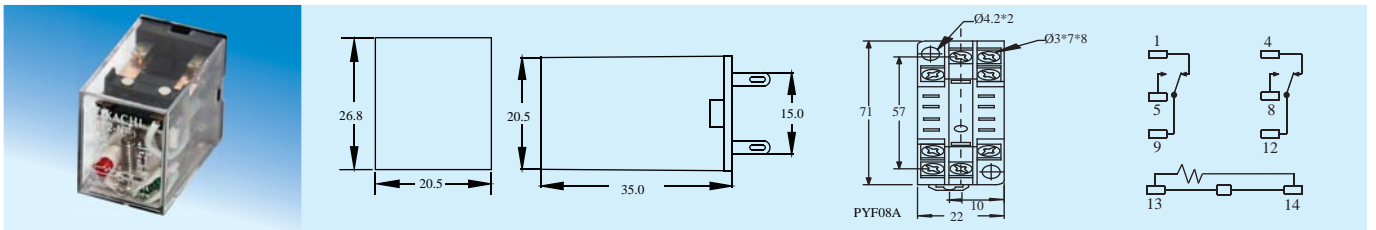


MY4-N

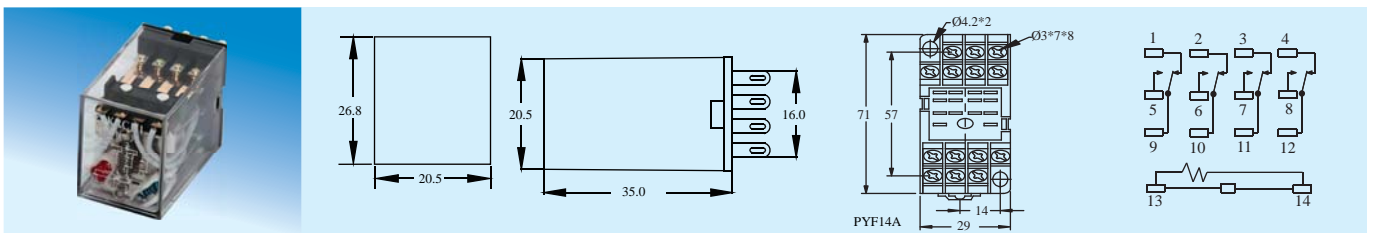

LY2-N

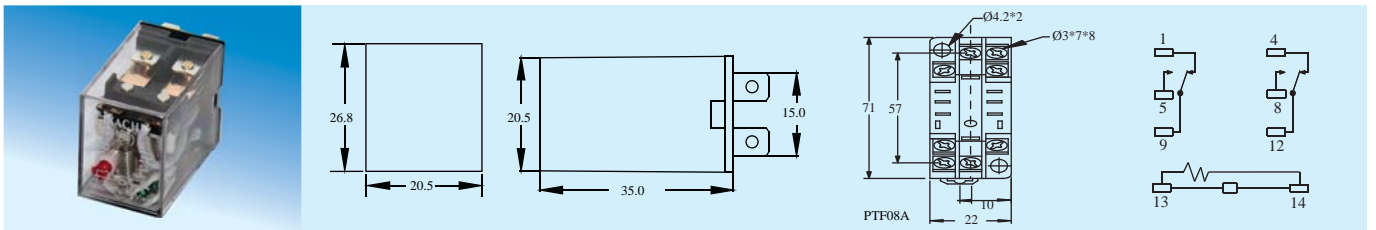

MK2P-N

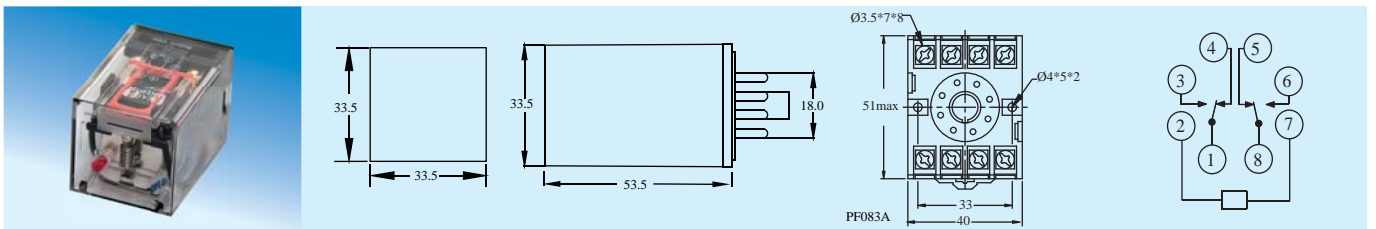

MK3P-N

